



Gulf PetroGas Co.  شركة بترو غاز الفليج

For Insulation and Petroleum Derivatives
للعوازل والمشتقات البترولية

ABOUT US

Gulf PetroGas Company is the leading player on the trading and manufacturing of Bitumen and Bituminous products in the Arab Gulf Region. Company established in the year 2004 as a subsidiary of Gulf Guide Company Ltd.

Gulf PetroGas have storage and factory premise located in Jebel Ali Zone (JAFZA), Dubai and we are specialized in trading bulk Bitumen in various grades and also manufacturing cutback such as medium, rapid and slow setting type, various grades of cationic and anionic emulsions and wide range of water proofing products.

We are deploying our best regional expertise and experienced to meet customer's expectation in its utmost level. We have professionally skilled and experienced personal in every level of our activity to meet our clients' requirements.

Gulf PetroGas has an edge over other Bitumen companies for its highest quality, un-interrupted and regular supply of Bitumen procured from various famous refineries and other recourse through the gulf.





Drumming

Gulf PetroGas has its own drumming plant in JEFZA Dubai for drumming of various Bitumen and Bituminous products.

WE HAVE A CAPACITY TO PRODUCE 1,250 DRUMS PER DAY.


SERVICES

We are committed to meet our client's requirements such as delivery time, Cost-effective and technically-efficient supply solution in its highest standard. To meet customer's requirements *Gulf PetroGas* has its own dedicated large fleet of Bitumen road tankers with various capacity such ranging from 25 MT to 40 MT. These are engaged in transporting the gulf region.

QUALITY POLICY


All our commitments, actions and products are expression of our commitment to produce only the highest quality deliverables to our clients. We are committed to supply quality (QC/QA) consistency in our products.

We have a full-fledged laboratory to make sure that we are meeting the highest standards in our products and services and look after R&D works. We follow the ASTM, AASHTO, super pave and British Standard with capability to design new product for a specific application and projects.

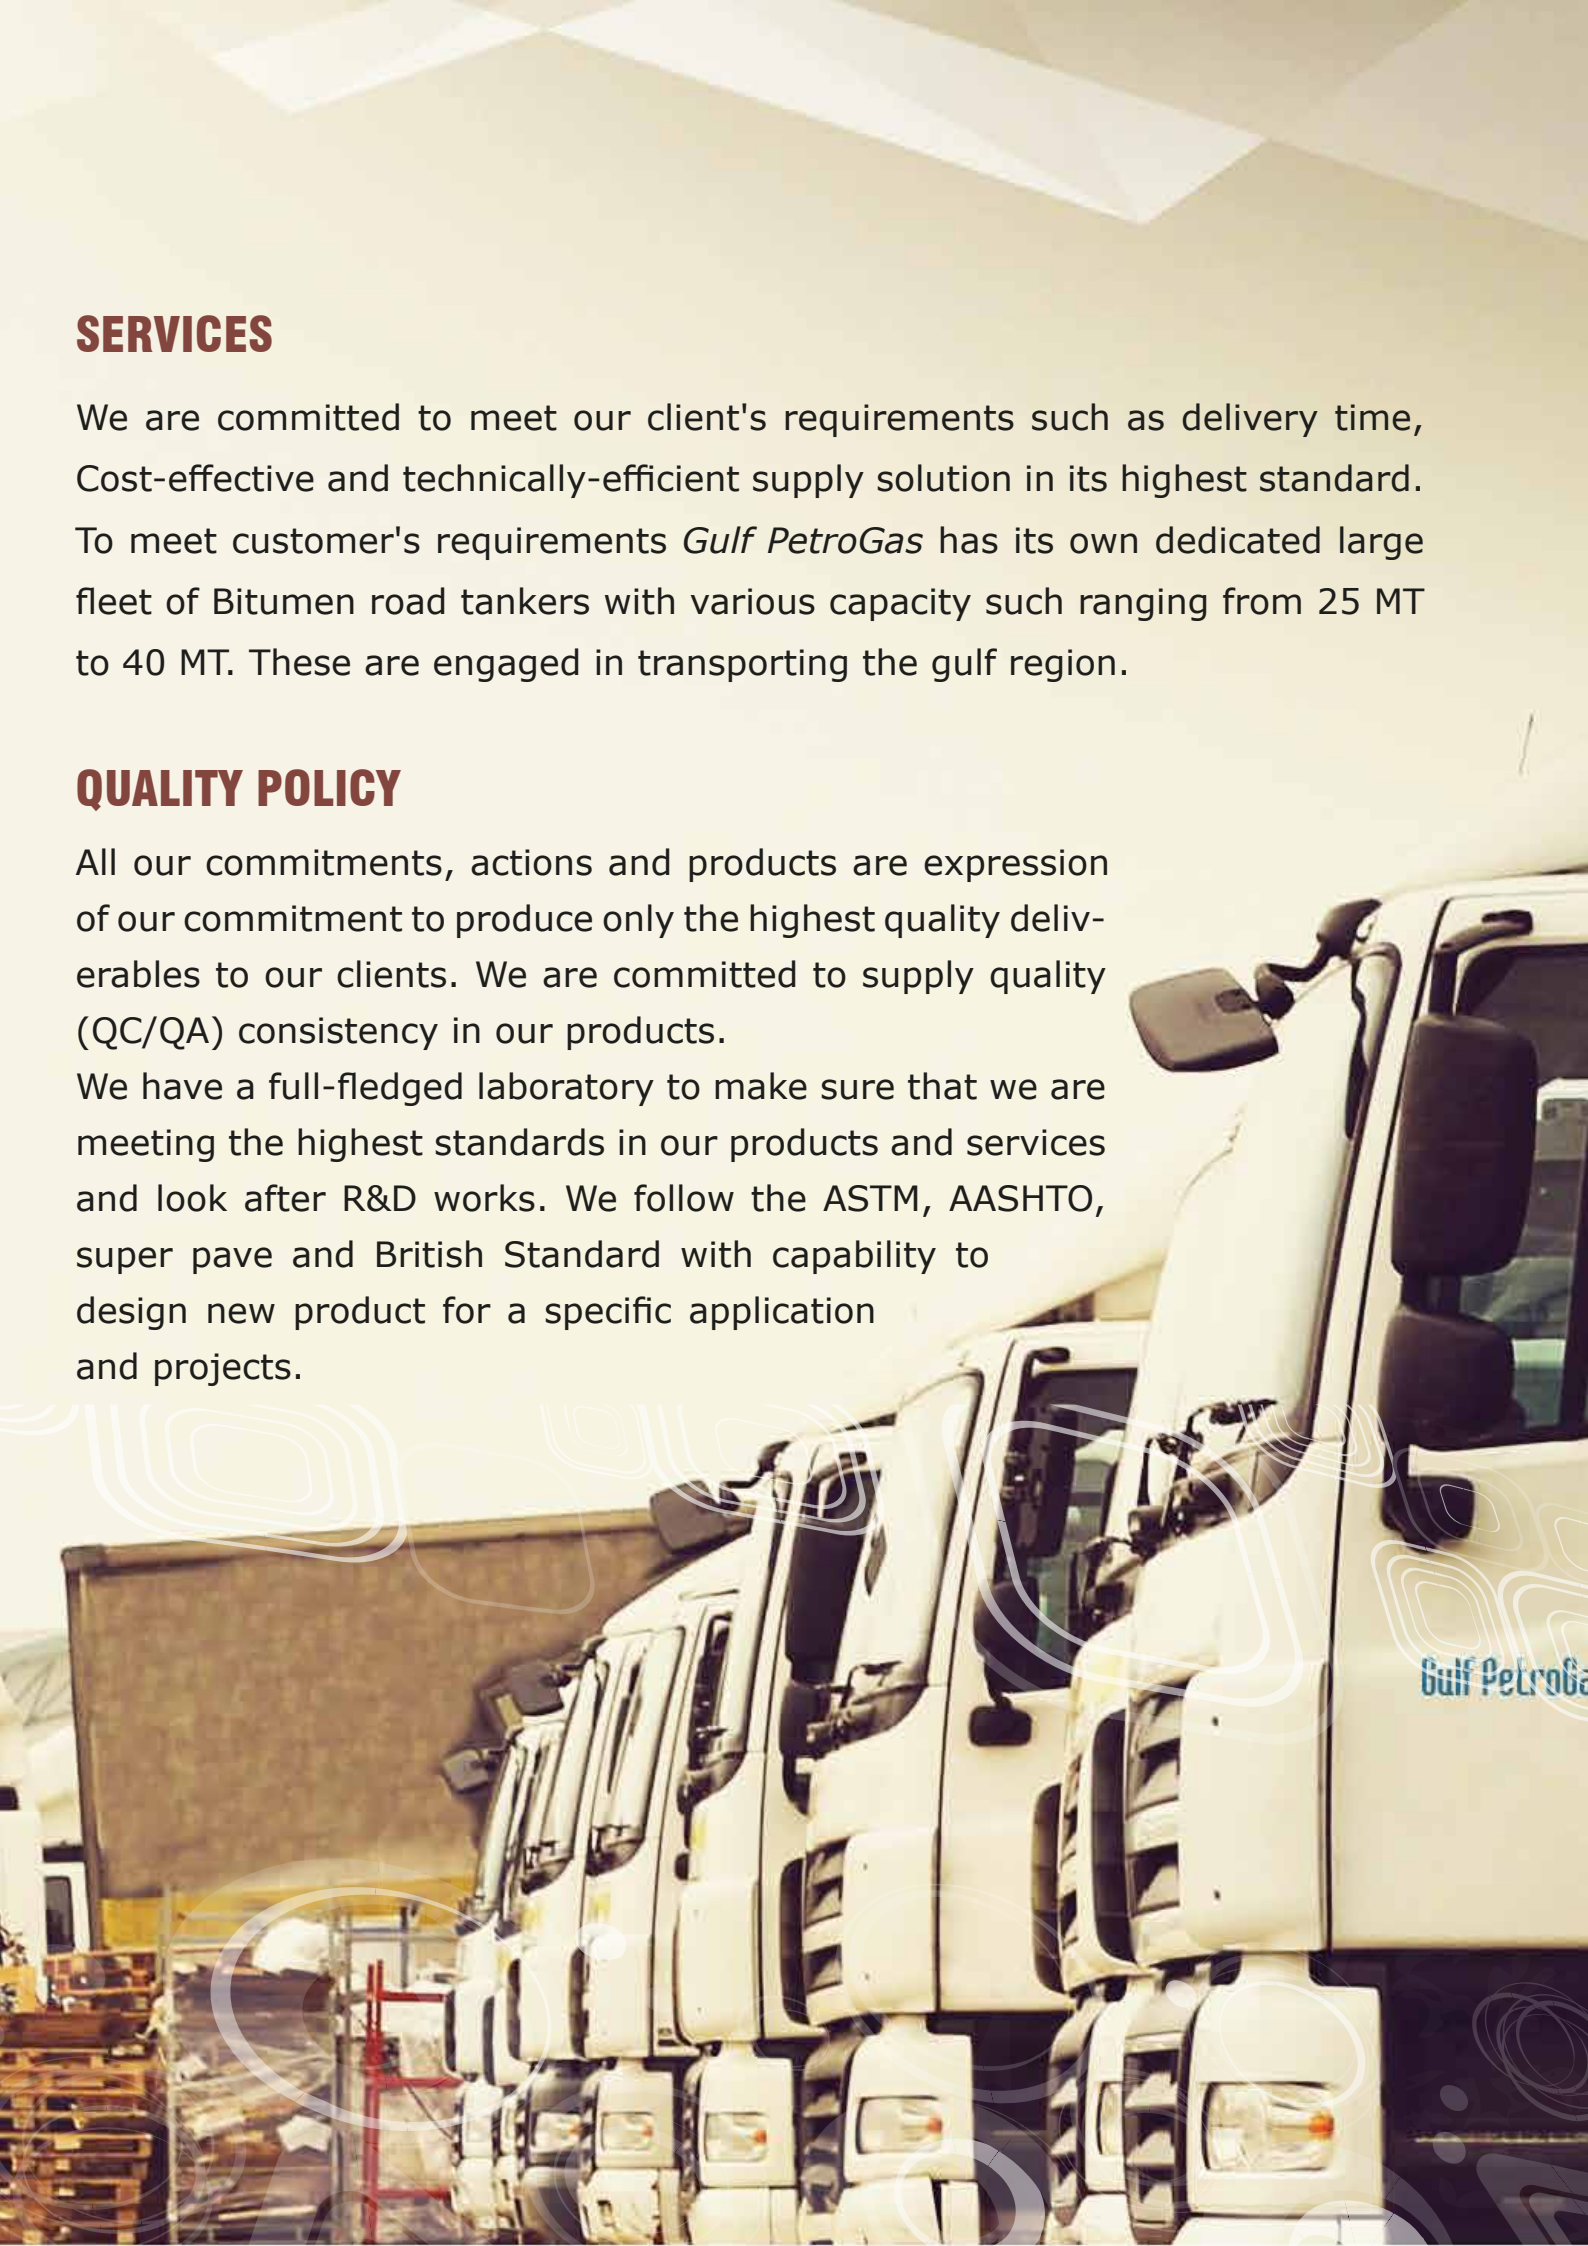



Gulf PetroGas Co.



شركة بترو غاز الفليج

PRODUCTS

BITUMEN PRIMER

No.	Product	Descriptions	Uses
1	PETROPRIMER D - 41	Solvent based Bitumen primer	Asphalt primer is used in roofing damp proofing and waterproofing. Bitumen based coating for cold application, suitable for use in contact with portable water.
2	PETROCOAT CB - 30	Water based Bitumen primer	Petrocoat is a clay stabilized thixotropic asphalt emulsion conforming to the requirements of ASTM D-1227. It has varied application as water-based primer.

BITUMEN EMULSION

No.	Product	Descriptions	Uses
1	PETROCOAT RBE 3505	Rubberized bitumen emulsion	Elastomeric cold applied bitumen coating for flexible protection of concrete surfaces that are below ground level. Tanking, waterproofing concrete, brick foundation, retaining wall, bridge abutments, basements, columns, wet areas etc.
2	PETROCOAT RBE 4010	Rubberized bitumen emulsion	Elastomeric cold applied bitumen coating for flexible protection of concrete surfaces that are below ground level. Damp Proof membrane in sandwich construction, Vapor Seal. Adhesion for bonding wooden flooring, insulation board, expanded polystyrene PVC and cork tiles etc.
3	PETROCOAT RBE 6010	Rubberized bitumen emulsion	Elastomeric cold applied bitumen coating for flexible protection of concrete surfaces that are below ground level. Damp Proof membrane in sandwich construction and vapor seal.

BITUMEN MASTIC

No.	Product	Descriptions	Uses
1	PETRO BITUMEN MASTIC	Cold applied bitumen mastic	Petro Bitumen Mastic is a single component cold pplied compound of bitumen, mineral fillers, polymer and additives. It cures to form a seal, with excellent adhesive to concrete, brickwork, asphalt and most construction materials. The Mastic sealant is modified with non-asbestos fibers to make the sealant thixotropic and slump free when applied on vertical areas.

EMULSIFIED ASPHALT - WATER BASED (ANIONIC)

No.	Product	Descriptions	Uses
1	SS - 1H	Slow setting type	SS-1H Is an anionic slow setting asphalt emulsion designed for use as a tack coat, in fine-graded mixes, dust control, fog seal and specialty applications. It is formulated with a harder base (lower penetration) than SS-1H for use in warmer climates.

EMULSIFIED ASPHALT - WATER BASED (CATIONIC)

No.	Product	Descriptions	Uses
1	CSS-1H	Slow setting type	CSS-1H emulsions are used for a variety of purposes. Slow setting emulsions are the most stable of emulsions, and generally can be diluted with water and mixed with mineral fillers and aggregates for all uses, the air and payment temperatures at construction should be sufficiently high to allow the emulsion to fully cure.
2	CRS-1	Rapid curing type	CR-1 Tack coat emulsion is used to bond old pavement to new in many types of applications including: overlays of new pavement to old, pothole patching, joint, curb and gutter interfaces. CRS- 1 is also used to bond speed bumps and parking stops onto existing asphalt pavement.

PRODUCTS

CUTBACK BITUMEN - MEDIUM CURING

No.	Product	Descriptions	Uses
1	MC-70	Medium Curing Cutback Bitumen	Cutback bitumen (Liquid Bitumen) is normally used in spraying and in some mixing applications. Cutback Bitumen is penetration grade bitumen blended with a solvent such as kerosene, White sprit, gasoline and naphtha controlling the curing time. Commonly used for road and pavement construction and maintenance.
2	MC- 3000	Medium Curing Cutback Bitumen	Cutback bitumen (Liquid Bitumen) is Bitumen in a petroleum solvent. Commonly used for road and pavement construction and maintenance.
3	MC- 30	Medium Curing Cutback Bitumen	Cutback bitumen (Liquid Bitumen) is Bitumen in a petroleum solvent. Commonly used for road and pavement construction and maintenance.

CUTBACK BITUMEN - RAPID CURING

No.	Product	Descriptions	Uses
1	RC-70	Rapid curing Cutback Bitumen	Cutback bitumen complies with cutback petroleum asphalt of the rapid-curing type of use in the construction and treatment of pavements as per ASTM D2028-97 reapproved 10 2004. Cutback Grade Bitumen is normally used in spraying and in some mixing applications.
2	RC-250	Rapid curing Cutback Bitumen	Cutback bitumen complies with cutback petroleum asphalt of the rapid-curing type of use in the construction and treatment of pavements as per ASTM D2028-97 reapproved 10 2004. Cutback Grade Bitumen is normally used in spraying and in some mixing applications.

BITUMEN - ASPHALT CEMENT - GENERAL WORKS

No.	Product	Descriptions	Uses
1	BITUMEN 60/70	Semi- solid form of Petroleum	The primary use (70%) of asphalt is in road construction, where it is used as the glue or binder mixed with aggregate particles to create asphalt concrete. Its other main uses are for bituminous waterproofing products, including production of roofing felt and for sealing flat roofs.
2	BITUMEN 40/50	Semi- solid form of Petroleum	The primary use (70%) of asphalt is in road construction, where it is used as the glue or binder mixed with aggregate particles to create asphalt concrete. Its other main uses are for bituminous waterproofing products, including production of roofing felt and for sealing flat roofs.











Gulf PetroGas Co.  شركة بترو غاز الفليج
For Insulation and Petroleum Derivatives
للعوازل والمشتقات البترولية

GULF GUIDE GROUP



For Insulation and Petroleum Derivatives
للعوازل والمشتقات البترولية



UNITED ARAB EMIRATES
DUBAI - JEBEL ALI

P.O. BOX 261566

TEL: +971 4 886 5551

FAX: +971 4 886 5552

CELL: +971 543032211

sales@gulfpetrogas.ae
www.gulf-petrogas.com



SAUDI ARABIA
DAMMAM

P.O. BOX 3870

TEL: +966 13 859 9000

FAX: +966 13 859 5000

CELL: +966 505882211

info@gulf-guide.com
www.gulf-guide.com



وكالة الفخامة العالمية للسفر والسياحة
MAJESTIC INTL. FOR TRAVEL & TOURISM



SAUDI ARABIA
AL KHOBAR 1 & 2
RIYADH

TEL: +966 13 859 9000

FAX: +966 13 859 5000

CELL: +966 505882211

info@majesticintltravel.com
www.majesticintltravel.com